


OWNER'S MANUAL
INSTALLATION, OPERATION, & PARTS
DUAL SUBMERGED SUCTION OUTLET FRAMES & COVERS
[Commonly called main drains]

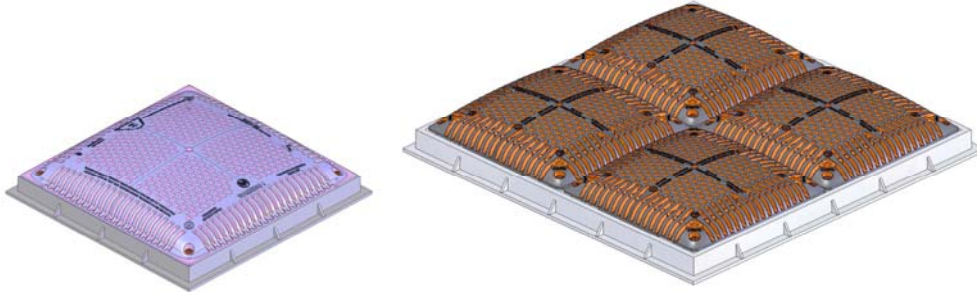

Page 4 of 8

DUAL SUBMERGED SUCTION OUTLET

ISSQUAREHF REV C

INSTALLATION INSTRUCTIONS: - Use a #2 Philips head Screwdriver.

NOTICE: When installing WG1032PAK2 or WG1033PAK2 refer to ASME A112.19.8b-2009 for the proper instructions on how to construct the field-fabricated sump. See Illustration on Page 7

Item	Description	Diameter
1	Cover	31.50 cm
2	Inner Frame	30.00 cm
3	Machine screw #10-24	
4	#13-9 Self Taping Screw	
5	Outer Frame	33.80 cm
	Screw holes are 28 cm apart	

