


ENHANCED BIOLOGICAL FILTRATION SYSTEM

AQUALIFE SERIES

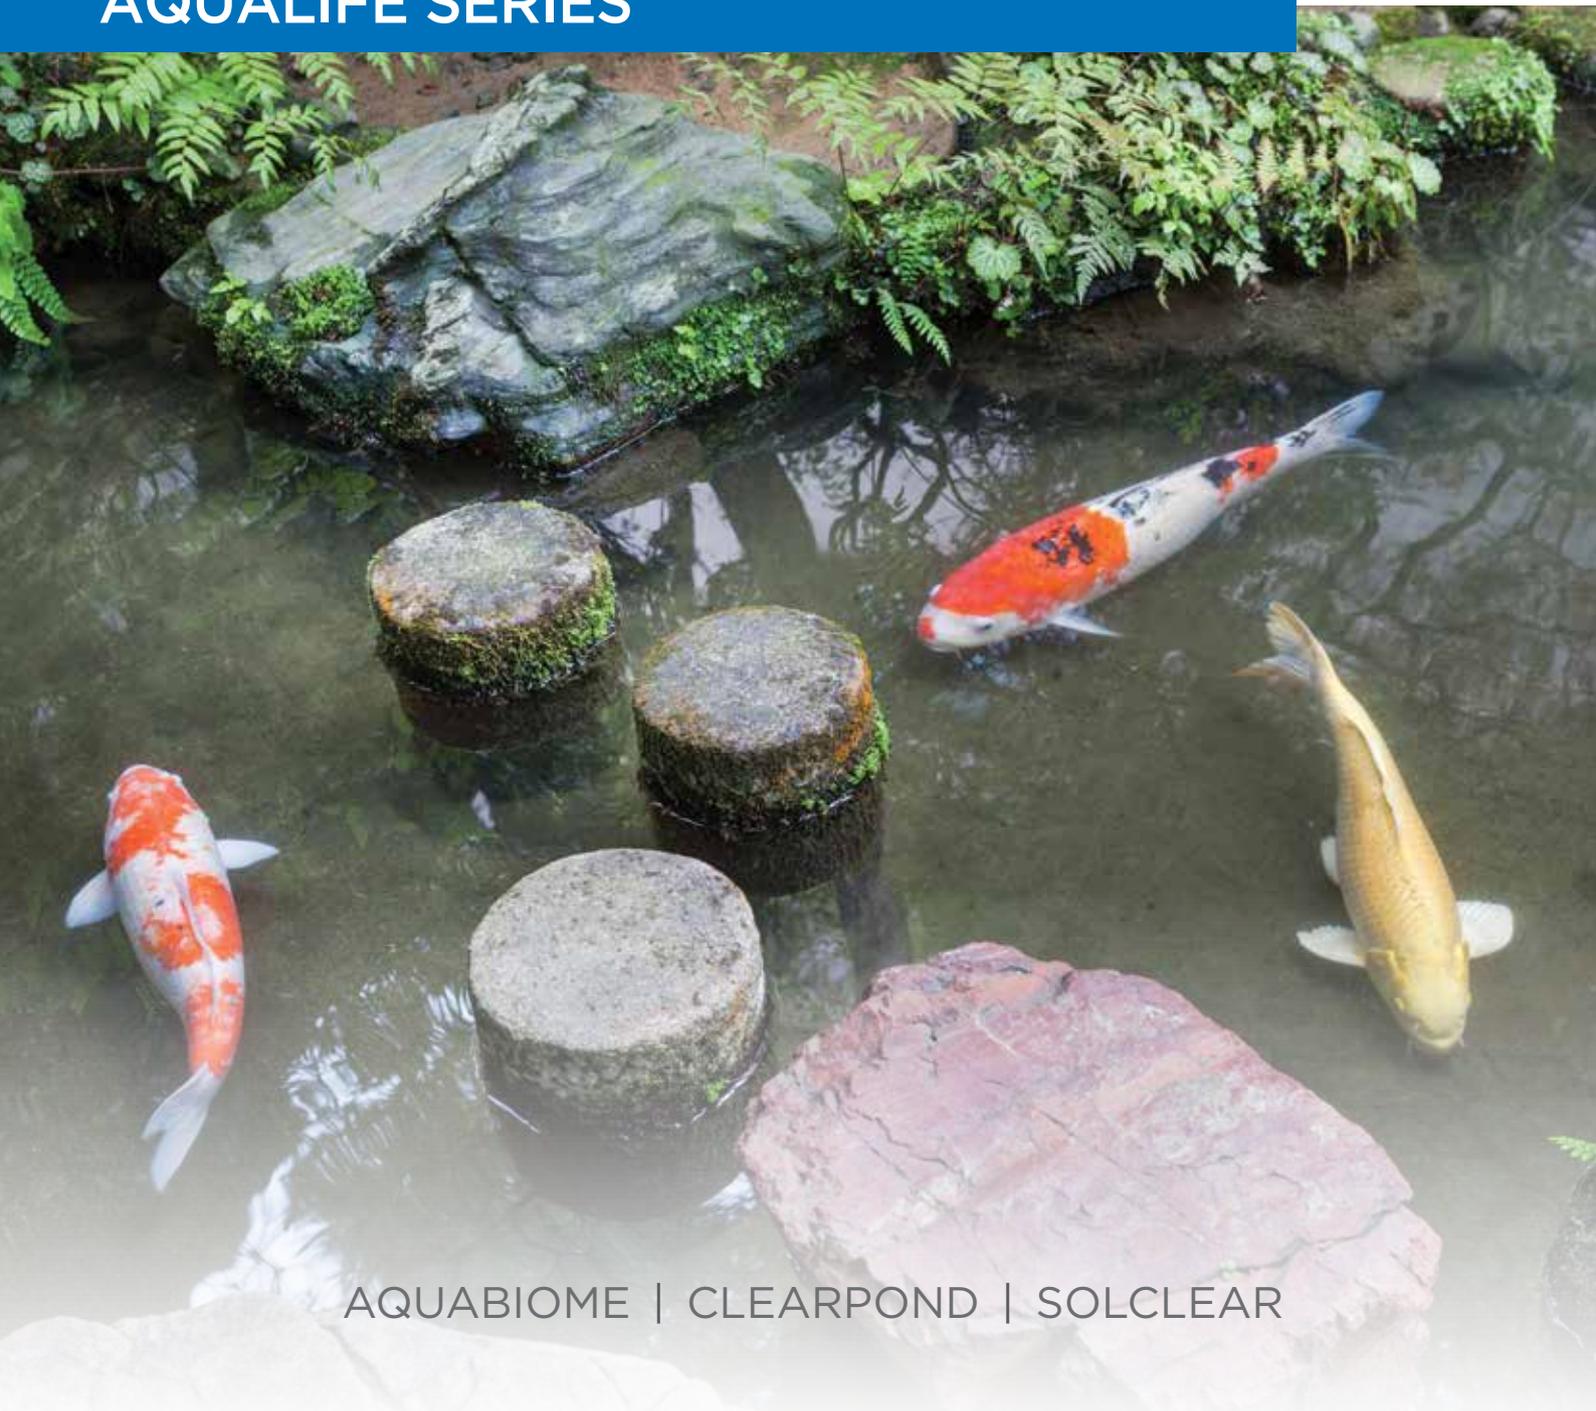

AQUABIOME | CLEARPOND | SOLCLEAR

AQUABIOME

Biological Filter



COST-EFFECTIVE BIOLOGICAL FILTER

Aquabiome has been engineered specifically for ponds and water gardens. Aquabiome provides mechanical and biological filtration in a single housing. Its ability to support dense populations of nitrifying bacteria, its reliability and easy maintenance, makes Aquabiome especially suitable for high density recirculation systems.

Effective

Excellent Nitrification and mechanical filtration.

Efficient

Hydraulically efficient filter design, balanced slotted laterals to maximize water flow and filtration.

Durable

Corrosion resistant and UV stabilised for outdoor installation.

Air-Backwash

Air assisted hydraulic backwash, saving time and water.

Superior Quality

Aquabiome fibreglass filters embody the latest in fibreglass winding technology



Specifications

Aquabiome	ASM500	ASM600	ASM750	ASM900
Nominal Diameter, mm	500	600	750	900
Filter Surface Area, m ²	0.20	0.30	0.44	0.64
Bed Depth, mm	290	360	400	440
Media Volume, litres	68	117	199	303
Media Weight, kg	34	58.5	99.5	151.5
Biofilter Surface Area m ²	74.8	128.7	218.9	333.3
Inlet/Outlet Connections	40mm	40mm	50mm	50mm
Filtration Flowrate, m ³ /hr	7.20	10.80	15.84	23.04
Backwash Flowrate, m ³ /hr	9.60	14.40	21.12	30.72
Recommended Pond Size, L	14,400	21,600	31,680	46,080
Feed Rate, kg per day	0.5	0.9	1.5	2.4
Total Ornamental Fish Weight*, kg	16.7	30	50	80
Total Aquaculture Fish Weight*, kg	50	90	150	240

* Maximum fish stocking weight depends on the percentage of body weight fed daily.

- Ornamental fish weight based on feeding rate of 3% of body weight.
- Aquaculture fish weight based on feeding rate of 1% of body weight.

Dimensions (mm)

Aquabiome	Length (L)	Width (W)	Height (H)
	mm	mm	mm
SM500	815	650	875
SM600	1040	650	925
SM750	1325	830	985
SM900	1328	930	1110



Warranty


Item	Domestic	Commercial
Aquabiome (ASM) Body	5 years	1 year
Aquabiome Blower	1 year	1 year
Multiport Valve, Fittings & Gauges	1 year	1 year

*Please refer to Waterco's warranty terms and conditions

Nitrogen Cycle

The cycle begins when fish eat and then excrete ammonia. Bacteria in the biological filter eats the ammonia and excretes nitrite. Nitrite is also toxic to fish and needs to be removed.

Another type of bacteria in the filter eats nitrite and excretes nitrate. Nitrate is non-toxic to fish in small quantities and is used by plants as fertilizer. The entire cycle then repeats itself upon completion.

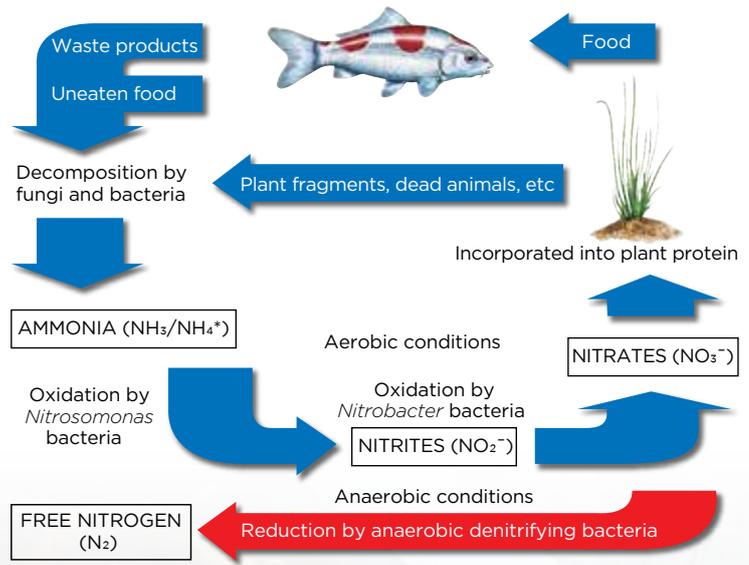

CLEARPOND

Enhanced Ammonia Removal & Dual Filtration

Dual Filtration

ZeoPlus provides excellent mechanical filtration of suspended particles. In addition to trapping the larger particulates between the grains of the ZeoPlus (similar to the filtration mechanism of sand), ZeoPlus is also capable of filtering the smaller particulates by catching them within its micro porous structure and surface irregularities.


It is this dual filtration action that helps ZeoPlus achieve superior water clarity.



Ammonia Removal

Ammonia is released whenever fish waste or fish food breaks down in the pond water. This chemical is very toxic to the fishes and it should be removed immediately or it needs to be converted to nitrates by nitrifying bacteria.

ZeoPlus is particularly suitable for koi ponds where high levels of ammonia are an ever present danger.

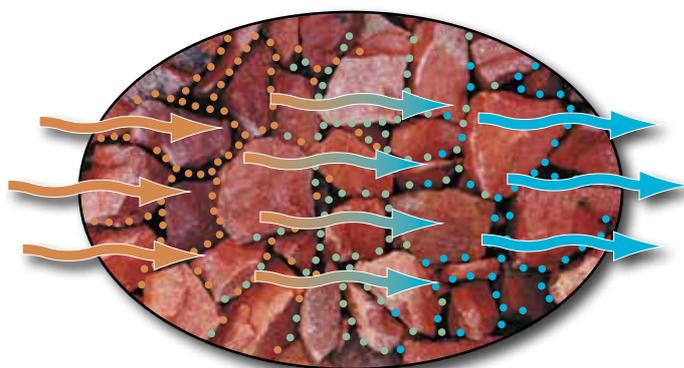

Specifications

Model No.	Valve Size	Inner Dia.	Filter Area	Bed Depth	Max. Flow*	Media Volume	ZeoPlus 0.6 - 1.2 mm
	mm	mm	sq.m ²	mm	lpm	litres	kg
CP500	40	500	0.20	250	157	62	75
CP600	40	600	0.28	250	226	89	107

Warranty

Item	Domestic	Commercial
Filter tank	10 years	5+5 years pro rata
Multiport Valve, Fittings & Gauges	1 year	1 year

*Please refer to Waterco's warranty terms and conditions

SOLCLEAR

UV Sterilisers



MULTI-PURPOSE ULTRA-VIOLET WATERDISINFECTION

The Solclear UV steriliser uses environmentally friendly ultraviolet technology for the disinfection of water. It provides disinfection without the addition of any chemicals.

Applicable to:

- Fountains
- Water features
- Koi ponds




Specifications

Model	Flow Rate		Quartz Thimble size mm	Inlet & Outlet size	UV Lamp	Lamp Wattage	Standard Ballasts	Ballast Size
	gpm	lpm						mm
Solclear 90	24	90	D24.5x910	1 ½" BSP	T540	40W	UVC-2040T	238 x 113 x 77
Solclear 150	40	150	D24.5x910	1 ½" BSP	T540	40W	UVC-2040T	238 x 113 x 77

Lamp life : 9,000 hours


Input voltage : 230 VAC (190-260VAC) / 50-60Hz
SS316 body available upon request, please contact our friendly sales staffs.

Dimension (mm)

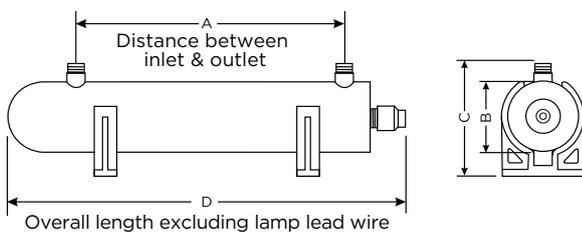

Model	A	B	C	D	Inlet & Outlet Size
	mm				
Solclear 90	780	63.5	115	925	1 ½" BSP

NOTE : Line cord and lamp lead wire omitted for clarity.

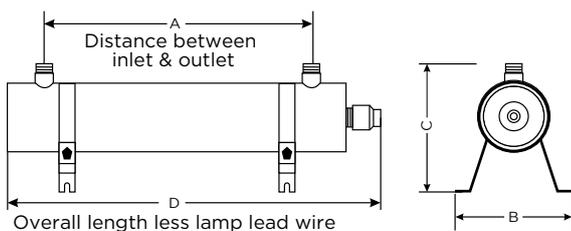

Model	A	B	C	D	Inlet & Outlet Size
	mm				
Solclear 150	786	175	165	926	1 ½" BSP

NOTE : Line cord and lamp lead wire omitted for clarity.

The Solclear 300 comes with the following features:

- Large flow rate application
- High UV lamp wattage for effective sanitization
- PVC housing for corrosion resistant




Specifications

Model	Flow Rate		Quartz Thimble size	Inlet & Outlet size	UV Lamp	Lamp Wattage	Standard Ballasts	Ballast Size
	gpm	lpm	mm					mm
Solclear 300	80	300	D30 x 910	2" Union	T6125 (212564)	125W	UV-24	450 x 350 x 205

Lamp life : 13,000 hours

Input Voltage: 230VAC / 50-60Hz

Dimension (mm)

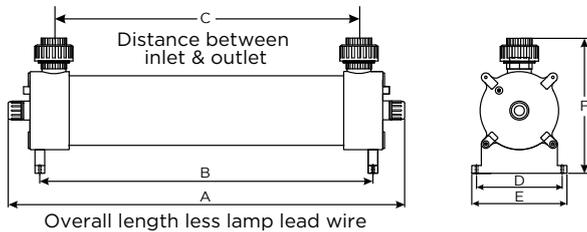

Model	A	B	C	D	E	F	Inlet & Outlet Size
	mm						
Solclear 300	946	748	660	268	298	426	2" Union


NOTE: Line cord and lamp lead wire omitted for clarity.

Warranty

Item	Domestic	Commercial
UV Steriliser (Solclear)	1 year	1 year

*Please refer to Waterco's warranty terms and conditions

The combination of Aquabiome biological filter, ClearPond filter and Solclear UV steriliser creates a synergy for a complete water filtration system for your aquaponics needs. With each equipment complements one another, a healthy ecosystem between aquatic livestock and crops is established.

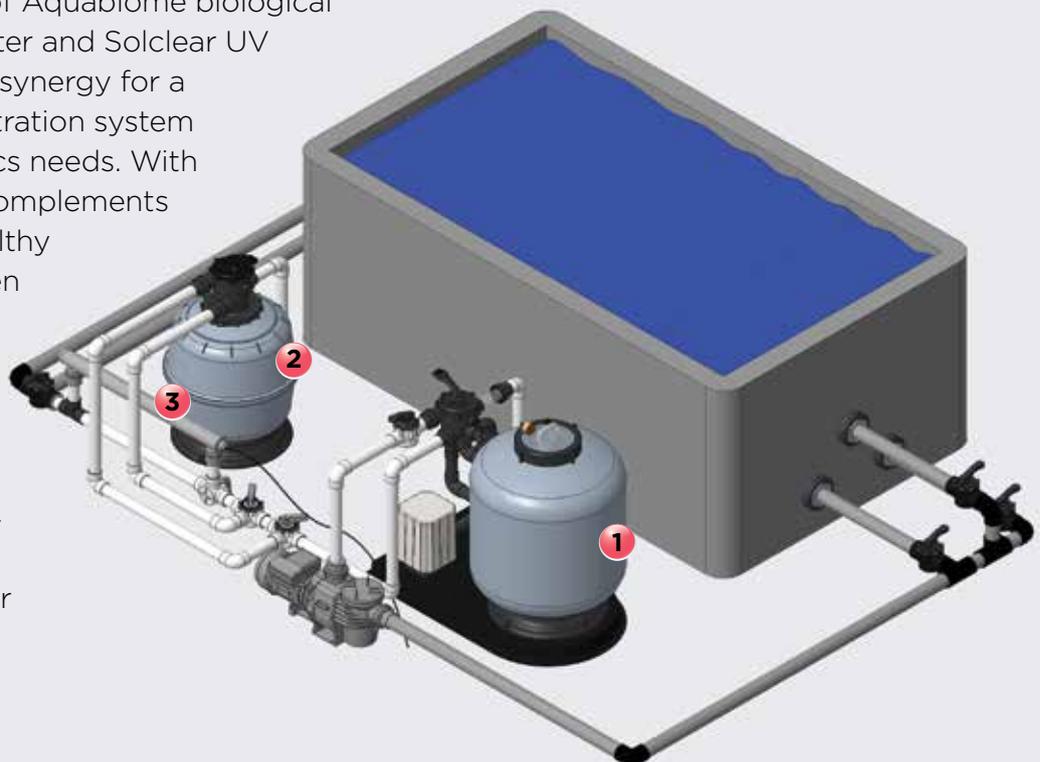

- 1 Aquabiome biological filter
- 2 ClearPond filter
- 3 Solclear UV steriliser

WATERCO

water, the liquid of life

Waterco pioneers reliable solutions for healthy, safe water environments, which are used in residential, commercial and industrial applications in over 40 countries.

Established in 1981, it has since become a global brand recognised for designing and manufacturing filtration and sanitisation innovations for the swimming pool, spa, aquaculture, and water purification sectors.



CONTACT WATERCO

Waterco's head office is situated in Sydney, Australia with international offices, manufacturing plants and warehouses located in Australia, New Zealand, Malaysia, Indonesia, Singapore, China, the US, Canada, and the UK.

OFFICES - AUSTRALIA

NSW - Sydney (Head Office)
Tel: +61 2 9898 8600
QLD - Brisbane
Tel: +61 7 3299 9900
VIC/TAS - Melbourne
Tel: +61 3 9764 1211
WA - Perth
Tel: +61 8 9273 1900
SA/NT - Adelaide
Tel: +61 8 8244 6000
ACT Distribution
Tel: +61 2 6280 6476

OFFICES - OVERSEAS

Waterco (Europe) Limited
Sittingbourne, Kent, UK
Tel: +44 (0) 1795 521 733

Waterco (USA) Inc
Augusta, Georgia, USA
Tel: +1 706 793 7291

Waterco Canada
Boucherville, Quebec, Canada
Tel: +1 450 748 1421

Waterco (NZ) Limited
Auckland, New Zealand
Tel: +64 9 525 7570

Waterco (C) Limited
Guangzhou, China
Tel: +86 20 3222 2180

Waterco (Far East) Sdn Bhd
Selangor, Malaysia
Tel: +60 3 6145 6000

PT Waterco Indonesia
Jakarta, Indonesia
Tel: +62 21 4585 1481

Waterco Singapore Intl Pte Ltd
Nehsons Building, Singapore
Tel: +65 6344 2378

DISTRIBUTED BY:

WATERCO
water, the liquid of life



SPASA
AUSTRALIAN MEMBER