

4 SEASONS SWIMMING

MR. PERFECT




INVERPAD®

TURBO

InverPad Turbo is an innovative and unique patent owned by Aquark. For the first time in pool industry, it utilizes the most advanced silent technology in Turbofan, which is combined with aerodynamic optimization and the best noise cancelling technologies to set a new milestone in noise level. You can hardly hear any mechanical noise.


Furthermore, InverPad Turbo was developed to run in the harshest conditions. Thanks to TurboFan's new airflow system, it increases the heat exchange area and maximizes heat output to guarantee an excellent performance under cold weather. Enjoy swimming all year long throughout the four seasons!

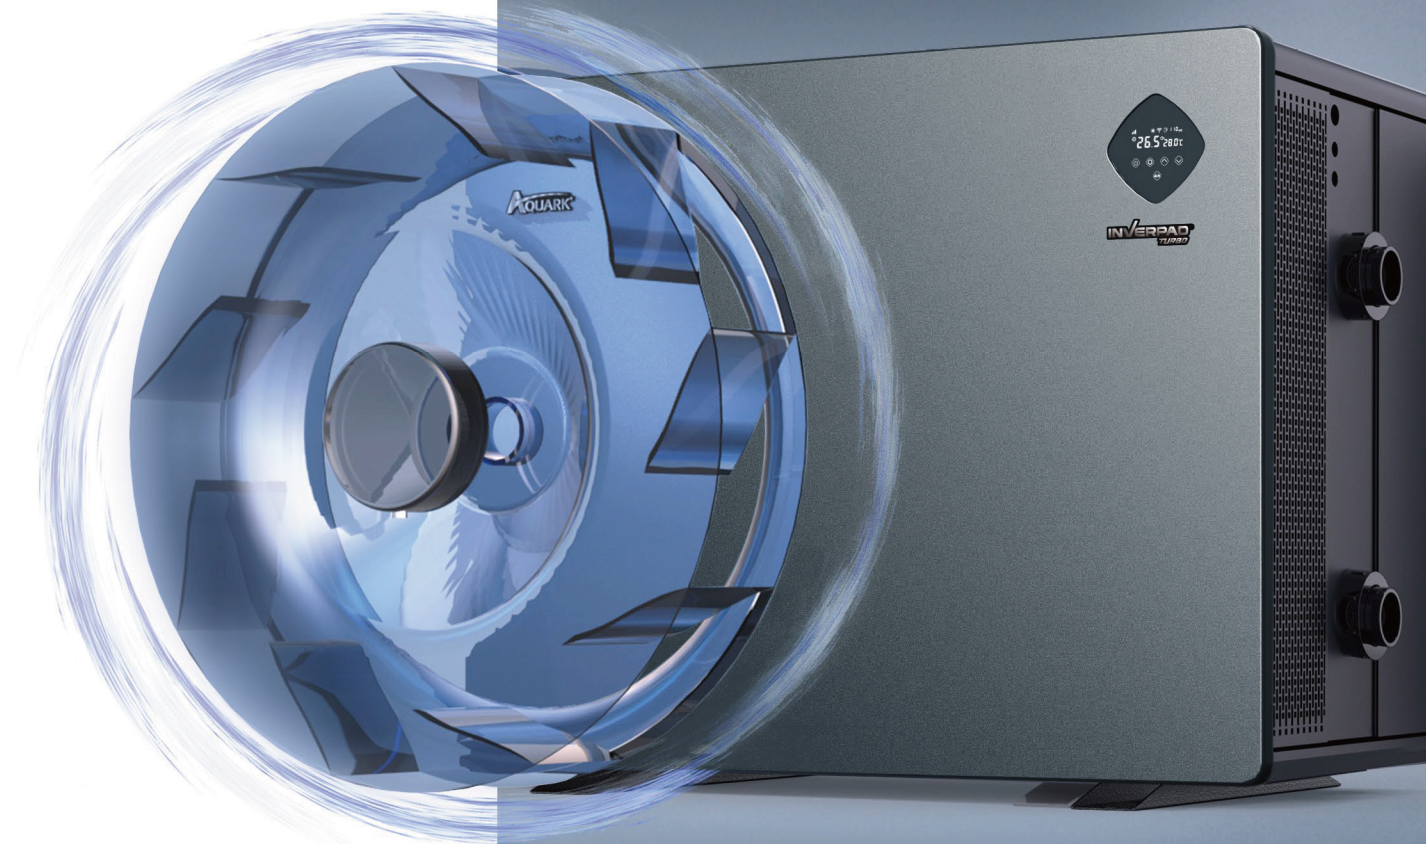

PERFECT SILENCE



38.4dB(A) AVERAGE




20 TIMES MORE SILENT
THAN ON/OFF HEAT PUMP



PERFECT PERFORMANCE


COP UP TO 16.0

69% MORE ENERGY SAVING
THAN ON/OFF

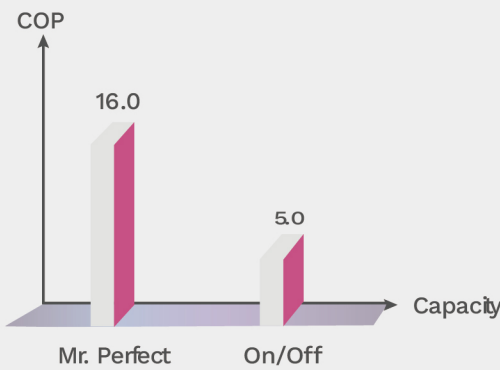

AIR OPERATION -15°C

50% HEATING OUTPUT
UNDER HARSH CONDITIONS

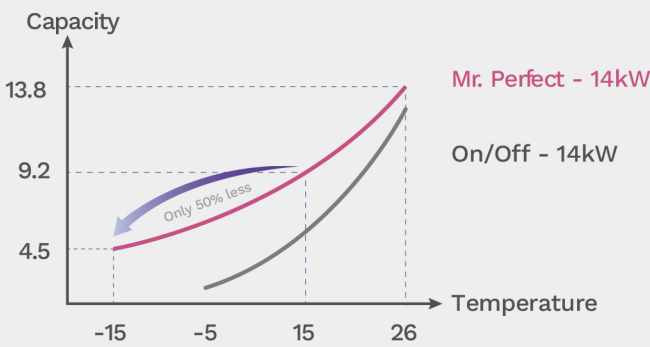


TRENDY APPEARANCE

Mr. Perfect incorporates round corners to the classic Pad design, enhancing simplicity and uniqueness to the next level.



Advanced Controller

The improved controller provides simple operation with advanced data monitoring. It also combines full panel tempered glass and responsive back lighting for a highly sophisticated appearance.

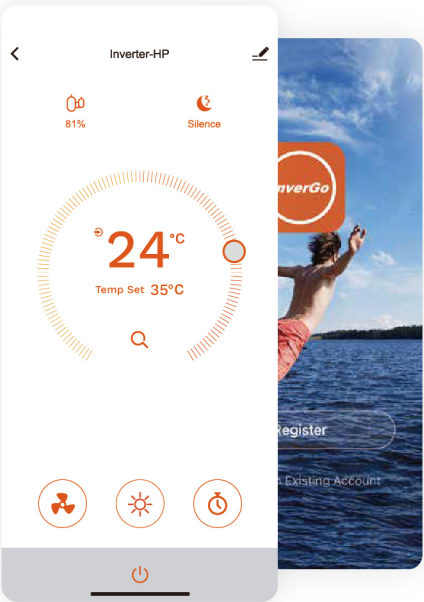

Built-in Wi-Fi

With built-in Wi-Fi and the smart app InverGo, you can get all the features in the controller of your heat pump, plus much more.





MORE
ADVANTAGES



Twisted titanium heat exchanger
40% higher efficiency



Twin-rotary DC
compressor



EEV Technology:
Increase COP by 20%



Full electrical system protection:
180V-260V and soft start



SPA option
Heat up to 40°C



Quick and efficient
Reverse cycle defrosting

Parameters of Mr. Perfect

		MPC170	MPC220	MPC270	MPC320S	MPC410S
Performance	Air 27°C / Water 27°C / Humidity 80%					
	Heating capacity (kW) Perfect Mode	13.4	17.5	20.6	26.8	34.5
	COP Range	15.0~7.1	15.5~7.4	15.2~7.3	15.8~7.2	16.0~7.0
	Average COP at 50% Speed	11.1	11.8	11.5	11.6	11.5
	Heating Capacity (kW) Power Mode	17.0	22.0	26.5	31.5	40.5
	Air 15°C / Water 26°C / Humidity 70%					
	Heating capacity (kW) Perfect Mode	9.2	12.4	14.4	18.0	23.9
	COP Range	7.8~5.0	8.2~5.1	7.9~5.2	8.0~5.0	8.3~5.1
	Average COP at 50% Speed	6.5	7.0	6.8	7.0	7.0
	Heating Capacity (kW) Power Mode	11.5	15.0	18.0	22.1	29.0
Components	Advised pool volume (m³)	35~65	40~80	50~95	60~120	85~160
	Operating air temperature	-15°C ~ 43°C				
	Compressor	Twin-Rotary DC Compressor				
	Fan Motor	Turbofan				
Sound	Casing	Aluminium Alloy				
	Power supply	230V 1Ph		400V 3Ph		
	Sound level at 1m dB(A)	39.3~46.7	39.5~49.8	39.8~50.2	40.5~50.9	40.6~51.3
Others	Sound level by 50% speed 1m dB(A)	42.2	43.1	43.0	45.6	45.7
	Sound level at 10m dB(A)	19.3~26.7	19.5~29.8	19.8~30.2	20.5~30.9	19.6~31.3
	Rated input power (kW)	0.36~2.67	0.45~3.33	0.54~4.00	0.60~4.42	0.78~5.80
Dimension	Input power at 50% Speed (kW)	0.71	0.89	1.06	1.29	1.71
	Rated input current (A)	1.57~11.63	1.96~14.49	2.35~17.39	0.86~6.41	1.13~8.41
	Advised water flux (m³/h)	4~6	6~9	8~10	10~12	12~18
	Water connection (mm)	50				
Dimension	Net dimension LxWxH (mm)	840×504×656	980×504×756	1135×514×756	1029×512×1107	1139×512×1106
	Net Weight (kg)	75	91	114	142	160
	Qty per 20FT / 40HQ (sets)	72/150	40/126	34/108	18/80	16/72

Remarks: The data above is only for reference. For specific data, please refer to the nameplate on the unit.

* Advised pool volume applies to a private pool with isothermal cover.






GO DOUBLE 4 SEASONS

Go Double maximizes user's swimming experience and investment by choosing a double capacity inverter heat pump.


Extreme silence

Over 1.4 times more silent

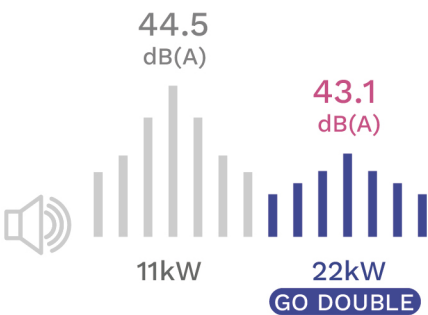


Extreme saving

More than 38% saving.

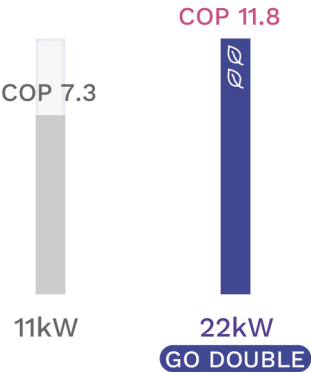


Double season

Extend your pool season by two and enjoy swimming for most of the year.

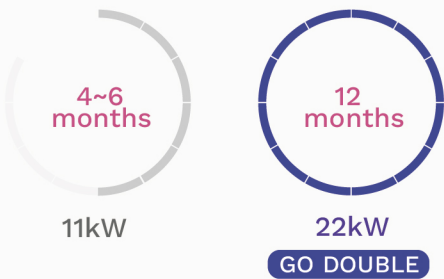

Double value

A 22kW heat pump doubles your pool season. Therefore, it doubles your pool investment return.

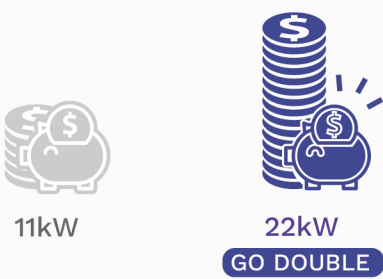

Sizing Reference

